
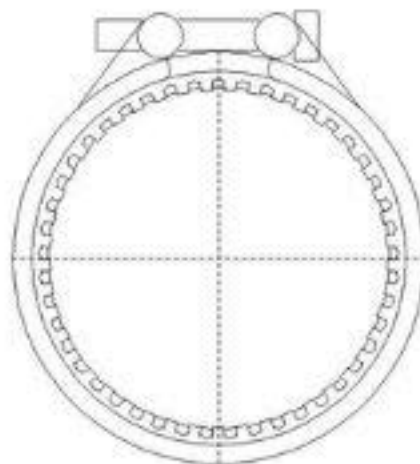


BORFLEX GRIP TYPE

DN25-600

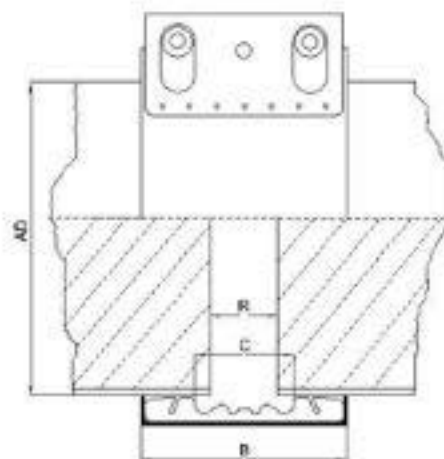

R= 5 mm (OD26,9-48,3)
 8 mm (OD54-60,3)
 10 mm (OD76,1-609,6)

BODY : 304 ss or 316 ss (optional)
SEALING: EPDM or NBR (optional)
STEM & BOLTS : Dacromate 500
 coated steel
ANCHORING RING : 301 ss

B= 56 mm (26,9-33,7)
 76 mm (38,0-60,3)
 105 mm (76,1-114,3)
 120 mm (127-168,3)
 152 mm (180-609,6)

C= 17 mm (26,9-33,7)
 30 mm (38,0-60,3)
 47 mm (76,1-114,3)
 60 mm (127-168,3)
 81 mm (180-609,6)